


Specifications

Power Pedestal, 5x5 Hinge Top without Base Direct Bury

cULus Listed: Standard 1773. Rated NEMA 3R. ADA compliant heights available.

5x5 , Hinged Cover, Surface Mount, 60 Amp Max

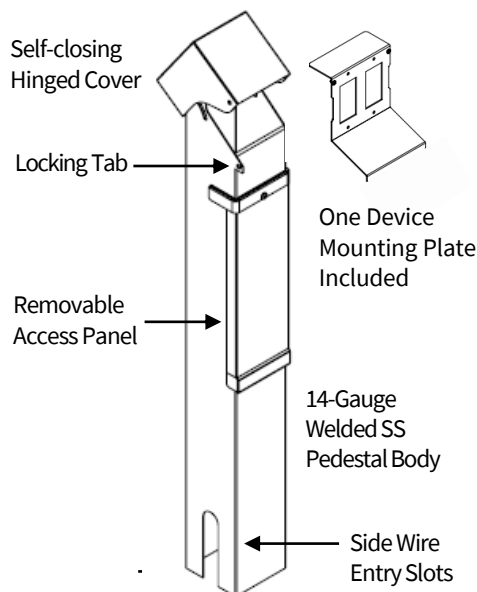

In-ground pedestal for both low amperage and industrial applications. Safely protects outdoor conduit, wiring and devices from shifting ground conditions and other harsh conditions.

- Offered in several 15 – 60 Amp configurations
- Locking hole to prohibit unwanted use
- Completely welded stainless construction
- Self-closing cover prevents ingress of water from outdoor elements
- Spacing between cover and pedestal to allow wiring to pass while-in-use
- May be ordered with an internal dividing channel to separate high and low voltage

Popular Applications


Ideal for commercial and everyday maintenance equipment, diesel engine block heaters, holiday lighting, pool pump motors, food trucks, scoreboards, reporting booths, personal devices and more

Specifications


Amperage	60 Amp max. rating
Material	304 Stainless Steel: 14-gauge body, cover and access panel; optional upgrade to 316
Construction	Welded body and weatherproof cover (lockable)
Finishes	Outdoor rated powder coat paint (standard and custom), brushed stainless
Heights	42", 48", 54" (24" must be buried below grade)
Dimensions	5" wide by 5" deep pedestal with 5-1/4" wide by 6-1/4" deep cover
Devices	Not supplied; can accommodate 15 – 60 Amp weather-resistant devices
Device Mount	Removable GFCI device mounting plate insert included
Cover	Auto-closing cover provides protection to meet while-in-use requirements for 15 and 20A devices; for aesthetics only when used with 30 – 60A devices
Hardware	Pre-installed stainless steel grounding hardware included
Application	May be ordered with a divider for high and low voltage (data)
Customization	Custom powder coat options
Installation	Open bottom, removeable wire access panel and wire entry slots

Device Mounting Configurations


Dual 20A (140)




20A & 30A (144)



Dual 30A (138)




30A 2-1/8" (148)




Note: All device mounting plates are not recommended for 90 degree or angled plugs


142 (30A 1-9/16")




50A Turn Lock Devices (176)



50/60A: Straight Blade Devices (154)



Typical Dimensions










See next page for part numbers →



Part Numbering

Power Pedestal, 5x5 Hinge Top without Base
Direct Bury

Part Numbering for Power Only Applications

Device Plate	Overall Length	Powder Coat SS ("C")	Brushed SS ("SS")	Device Plate	Overall Length	Powder Coat SS ("C")	Brushed SS ("SS")
Dual 20A (140) 	42"	542-C-HT-* -140	542-SS-HT-140	30A 2-1/8" (148) 	42"	542-C-HT-* -148	542-SS-HT-148
	48"	548-C-HT-* -140	548-SS-HT-140		48"	548-C-HT-* -148	548-SS-HT-148
	54"	554-C-HT-* -140	554-SS-HT-140		54"	554-C-HT-* -148	554-SS-HT-148
Dual 30A (138) 	42"	542-C-HT-* -138	542-SS-HT-138	50A Turn Lock Devices (176) 	42"	542-C-HT-* -176	542-SS-HT-176
	48"	548-C-HT-* -138	548-SS-HT-138		48"	548-C-HT-* -176	548-SS-HT-176
	54"	554-C-HT-* -138	554-SS-HT-138		54"	554-C-HT-* -176	554-SS-HT-176
30A 1-9/16" (142) 	42"	542-C-HT-* -142	542-SS-HT-142	50/60A: Straight Blade Devices (154) 	42"	542-C-HT-* -154	542-SS-HT-154
	48"	548-C-HT-* -142	548-SS-HT-142		48"	548-C-HT-* -154	548-SS-HT-154
	54"	554-C-HT-* -142	554-SS-HT-142		54"	554-C-HT-* -154	554-SS-HT-154
20A & 30A (144) 	42"	542-C-HT-* -144	542-SS-HT-144	Note: All device mounting plates are not recommended for 90 degree or angled plugs			
	48"	548-C-HT-* -144	548-SS-HT-144				
	54"	554-C-HT-* -144	554-SS-HT-144				

Part Numbering for High and Low Voltage Applications

Device Plate	Overall Length	Powder Coat SS ("C")	Brushed SS ("SS")	Device Plate	Overall Length	Powder Coat SS ("C")	Brushed SS ("SS")
Dual 20A (140) 	42"	542-C-D-HT-* -140	542-SS-D-HT-140	20A & 30A (144) 	42"	542-C-D-HT-* -144	542-SS-D-HT-144
	48"	548-C-D-HT-* -140	548-SS-D-HT-140		48"	548-C-D-HT-* -144	548-SS-D-HT-144
	54"	554-C-D-HT-* -140	554-SS-D-HT-140		54"	554-C-D-HT-* -144	554-SS-D-HT-144

Part Numbering Guide

Mounting Type	Hgt. in Inches	Finish Type	High/Low Volt. Divider	Cover	Color (coated only)	Device Mtg. Plate
5 (always)	42 48 54	-C (powder coated) -SS (brushed)	-D (divided) (leave blank for power only)	-HT (always)	-B (black) -G (gray) -BRZ (bronze) -GN (green) -BR (brown) -CSTM (custom) leave blank for "SS" finish	-140 (Dual 20A) -142 (30A 1-9/16" dia.) -144 (20A and 30A) -148 (30A 2-1/8" dia.) -154 (50/60A Straight Blade) -176 (50/60A Turn Lock)

Example: 542-C-HT-B-140 (5x5, 42" overall length, powder coated, hinge top, black, 2-gang)

5 (always)	48 48" high	-C Coated	-D Blank	-HT (always)	-B Black	-140 Dual 20A
----------------------	-----------------------	---------------------	--------------------	------------------------	--------------------	-------------------------

Finishes

*** Insert powder coat finish code:**

B = black, G = gray, BRZ = bronze, GN = green, BR = brown, CSTM = custom

Black (B)

Gray (G)

Bronze (BRZ)

Green (GN)

Brown (BR)

Custom (CSTM)

Brushed Finish (SS)