


Specifications: Flush Mount Hinge Top

Unobtrusive design for areas with limited space



UL Listed: Standard 1773. Rated NEMA 3R. Options that meet ADA minimum 15" receptacle height requirement.

4x4 Flush Mount Hinge Top | 1-gang, 2-gang, 2-gang divided

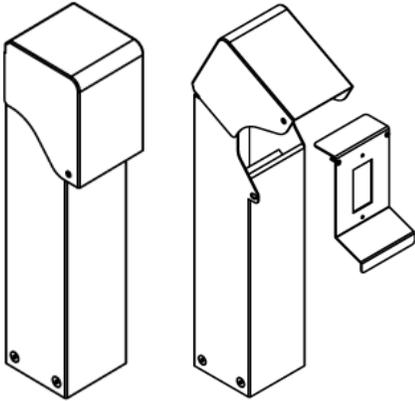

- Welded hinge cover provides added strength.
- Solid construction saves on costly repair and replacement maintenance.
- Choice of device mounting plates.

Free standing power pedestals that are an aesthetically pleasing solution to safely and conveniently bring power to any outdoor location. Offering hundreds of configurations and finishes, Pedocs will blend into any landscape.

- Self-closing cover prevents ingress of water from outdoor elements
- Outdoor rated powder coat options or brushed stainless finish
- Mounts flush to outdoor structures with internal bracketing
- May be ordered with an internal dividing channel to separate high and low voltage
- Locking tab to prevent unwanted use
- Heavy stainless steel (SS) welded construction

Material	14-gauge 304 Stainless Steel (standard); optional upgrade to 316
Heights	12", 18", 24", 30"
Dimensions	4" wide by 4" deep pedestal with 4-1/4" wide by 5" deep cover
Amperage	Accepts up to 20 amp devices
Hardware	Pre-installed SS grounding hardware; anchoring brackets included
Customization	Option for custom colors
Installation	Open bottom to accommodate two 1-1/2" conduit raceways
Receptacles	Removable GFCI device mounting plate insert included
Compliance	UL Listed, NEMA 3R (weatherproof) for outdoor locations
Additional	Devices not supplied; 12" height for non-3R installations only

Popular application settings


Balconies • Airports • Pool Areas • Commercial Parking Lots • Pools and Spas • Amusement Parks • Festivals • Street Fairs • Amenity Decks • Campgrounds • Golf Courses • Marinas • Stadiums • College and corporate campuses



Part Numbering						
Mounting type	Hgt.	Finish type	High/low volt. divider	Cover	Color (coated only)	Device openings
4FMIM (always)	12" 18" 24" 30"	-C: powder coated -SS: brushed	Blank (power only) -D: divided	-HT (always)	-B: black -G: gray -BRZ: bronze -GN: green -BR: brown -*CSTM: custom	1: 1-gang 2: 2-gang

Example: 4FMIM18-C-HT-B-1
18" tall, powder coated, non-divided, hinge top, black, 1-gang

Device mounting plate options

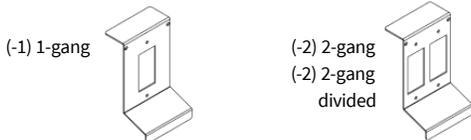

Finishes

